


Micro Armor Fiber™ The Original Stainless Steel Armor MultiMode 24 Core 250um OM4 Plenum Armored Fiber Optical Cable Model # TF24-OM4-PL

TiniFiber® is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber™ can be used in any channel from Telco, CATV, WAN LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor as well as Aerial installations and regardless of environmental conditions.

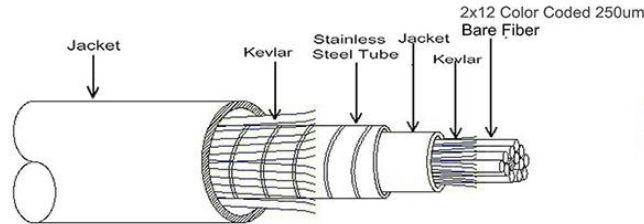

Outer Jacket
Material: Plenum
Color: Aqua
Outer Diameter: 6.0 mm

250um color coded fiber, Kevlar, Inner Jacket, Steel Tube, Kevlar, Outer Jacket (Aqua) UL/OFCP

TiniFiber® Micro Armor Fiber™ Key Features


Feature	Benefits
Micro Armor Fiber™	<ol style="list-style-type: none"> 1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility 2. Lightest and smallest armor makes routing and installation faster and easier 3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor (AIA)
Encased Stainless Steel Coiled Tubular Armor	<ol style="list-style-type: none"> 1. Provides the strongest armor with maximum bend radius and designed for all indoor & outdoor conditions 2. Crush and rodent resistance for multiple usages
Outer Jackets	<ol style="list-style-type: none"> 1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial & Industrial projects
MultiMode/SingleMode Strands	<ol style="list-style-type: none"> 1. OS2, OM1, OM3, OM4 from 1 to 144 Strands (250u/900u/Ribbon) 2. Available in all standard connectors
Kevlar Fiber Strands	<ol style="list-style-type: none"> 1. Adds tensile strength and flexibility

Competitive Product Analysis

Feature	Micro Armor Fiber™	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
Maximum Bend Radius	✓		✓
Smallest OD With Armor	✓		
Lightest Armor Fiber	✓		
Strongest Armor Fiber	✓	✓	
Lowest Installation Cost	✓		✓

Micro Armor Fiber™ The Original Stainless Steel Armor MultiMode 24 Core 250um OM4 Plenum Armored Fiber Optical Cable Model # TF24-OM4-PL

Common Installations: Ducts, conduits and indoor when installed according to NEC® Article 770
Design and Test Criteria: ANSI/ICEA S-87-640

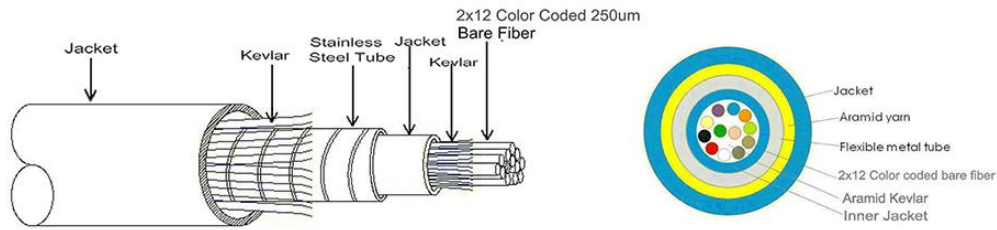

Competitive Product Analysis

Application	Indoor Premise, Duct, Conduits and Patch
Fiber Category	MultiMode (OM4)
Fiber Make	Corning ClearCurve OM4
Storage	-40 °C to 80 °C (-40 °F to 176 °F)
Installation	-30 °C to 80 °C (-22 °F to 176 °F)
Operation	-40 °C to 80 °C (-40 °F to 176 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	20D
Min. Static Bend Radius	10D
Nominal Outer Diameter	6.0 mm
Weight	55 kg/km
Stainless Steel Tube Outer Diameter	4.2mm
Stainless Steel Tube Inner Diameter	3.6 mm
Wavelengths/Max. Attenuation	850 nm/<3.0dB/km, 1300 nm/<1.0dB/km
Fiber core/cladding diameter	50/125 um
Fiber Count	24
Steel Braid	Yes
Kevlar	1000dtex
Maximum Data Rate	40 GB
NEC Rating	OFCP