




General Specifications

P/N	ST432RR-OS2-PLO - 2
Application and Uses	Indoor Outdoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	Plenum-UV BLACK
Fiber Category	Singlemode OS2
Fiber Type	G.657A1
Fiber Count / Grouping	432 Rollable Ribbon Fiber
Construction	250 um
Maximum Attenuation	≤0.40 dB/KM @ 1310nm ≤0.30 dB/KM @ 1550nm
Core/Cladding	9/125
Water Block	Yes
Aarmor	Corrugated Steel Tape
Maximum Tensile Strength (Dynamic Static)	2700 N 900 N
Maximum Crush Resistance (Dynamic Static)	1000 N/100mm 300 N/100mm
Minimum Bend Radius (Dynamic Static)	20D 15D
Nominal Outer Diameter	18.0 mm (±10%)
Cable Weight	298 kg/km Max Reel 2KM
Installation Temperature	-10 to 60 °C (14 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)
Storage Temperature	-15 to 60 °C (5 to 140 °F)

Part Number: ST432RR-OS2-PLO - 2
432 Strand Singlemode OS2 Corrugated Steel Tape Armor BLACK
Plenum-UV Indoor Outdoor Premise, Duct, Conduits, and Patch

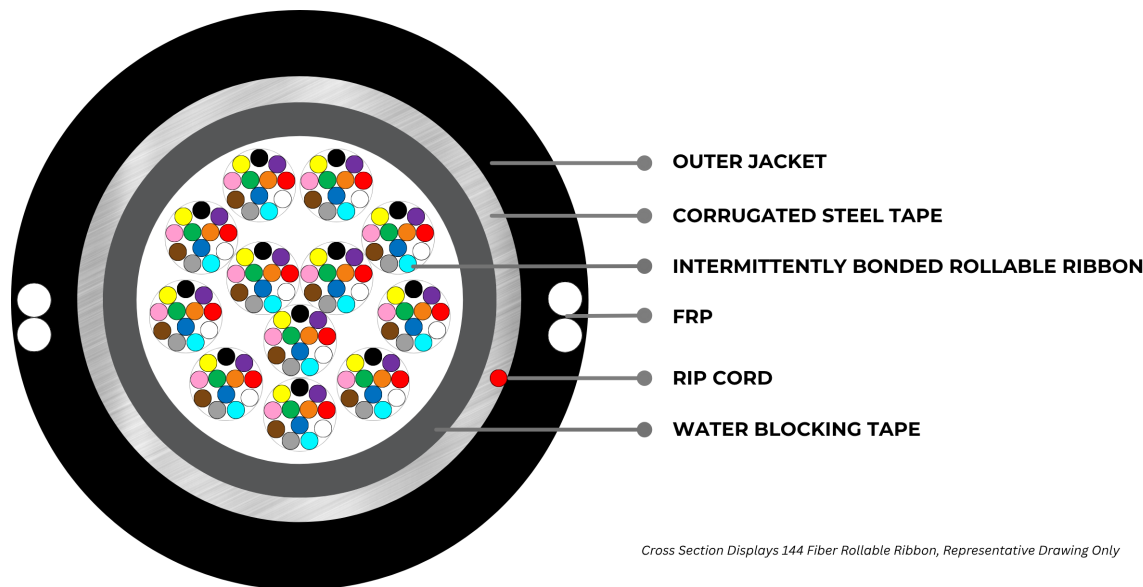

Patent Number

<https://tinifiber.com/patent-notice>