


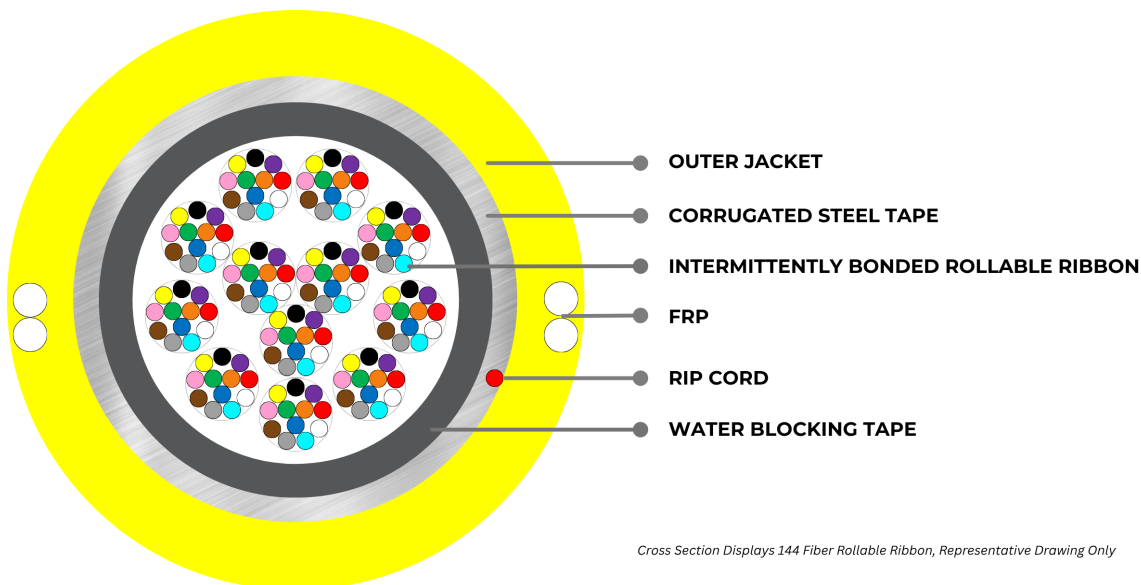

General Specifications

P/N	ST864RR-OS2-PL - 2
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM YELLOW
Fiber Category	Singlemode OS2
Fiber Type	G.657A1
Fiber Count / Grouping	864 Fiber Rollable Ribbon
Construction	250 um
Maximum Attenuation	≤0.40 dB/KM @ 1310nm ≤0.30 dB/KM @ 1550nm
Core/Cladding	9/125
Armor	Corrugated Steel Tape
Maximum Tensile Strength (Dynamic Static)	2700 N 900 N
Maximum Crush Resistance (Dynamic Static)	1000 N/100mm 300 N/100mm
Minimum Bend Radius (Dynamic Static)	≥20D ≥10D
Nominal Outer Diameter	21.8 mm (±10%)
Cable Weight	351 kg/km (±10%) Max Reel 2KM
Installation Temperature	-10 to 60 °C (14 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)
Storage Temperature	-15 to 60 °C (5 to 140 °F)
Patent Number	https://tinifiber.com/patent-notice