# Part Number: TF12-CM3-PL
# 12 Strand 1x12f 250 m Sub-unitized Multimode OM3 50/125 TiniFiber¨ Micro Armor[a] + Steel Braid Aqua Plenum (PVC) Indoor Premise, Duct, Conduits, and Patch

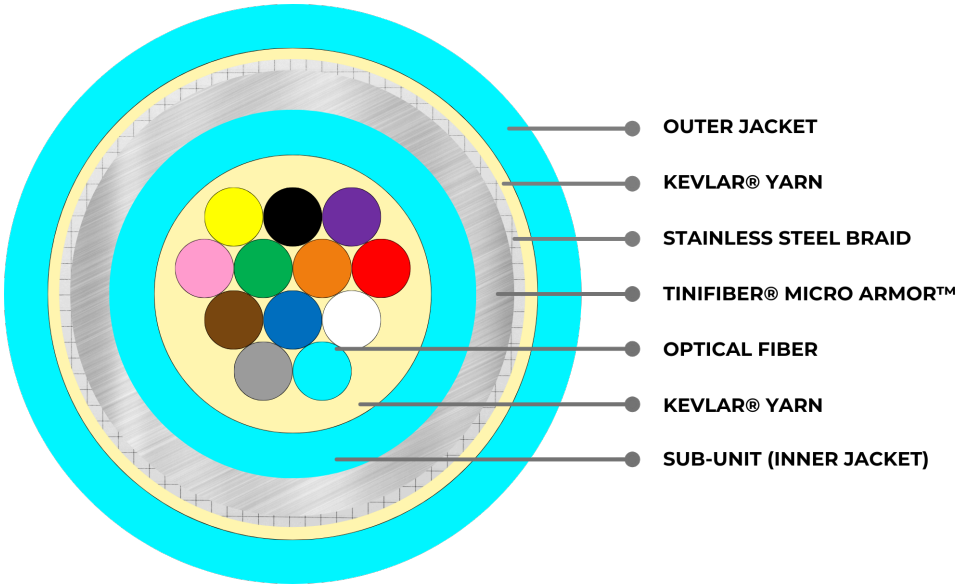


## General Specifications

| | |
|---|---|
| **P/N** | TF12-CM3-PL |
| **Application and Uses** | Indoor Premise, Duct, Conduits, and Patch |
| **Outer Jacket Specifications / Color** | PLENUM (PVC) \| AQUA |
| **Fiber Category** | MULTIMODE OM4 |
| **Fiber Type** | Corning ClearCurve® OM4 |
| **Fiber Count / Grouping** | 12 Strand \| 1x12f |
| **Construction** | 250 µm Sub-unitized |
| **Core/Cladding** | 50/125 |
| **Armor** | TiniFiber Micro Armor™ + Steel Braid |
| **Maximum Tensile Strength (Dynamic \| Static)** | 800 N \| 200 N |
| **Maximum Crush Resistance (Dynamic \| Static)** | 30 kN/m \| 5 kN/m |
| **Minimum Bend Radius (Dynamic \| Static)** | 20D \| 10D |
| **Nominal Outer Diameter** | 6.0±0.5 |
| **Installation Temperature** | 0 to 60 °C (32 to 140 °F) |
| **Operation Temperature** | -15 to 60 °C (5 to 140 °F) |



1180 ROUTE 109 | Lindenhurst, NY 11757 | 1(800)-396-0142 | sales@tinifiber.com