


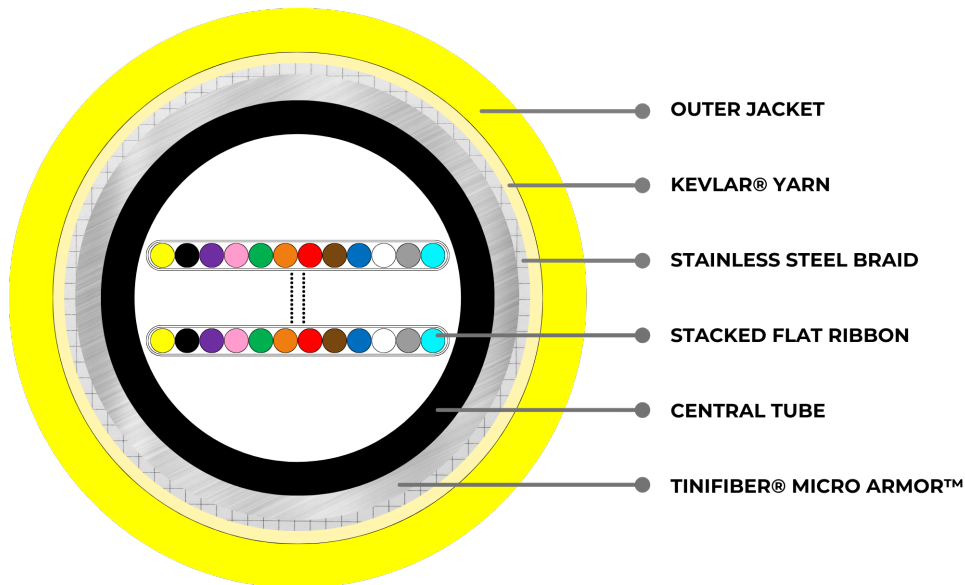

General Specifications

P/N	TF144R-OS2-PVC
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PVC Yellow
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	144 Strand 12x12f
Construction	250 µm Central Tube Flat Stacked Ribbon
Core/Cladding	9/125
Aarmor	TiniFiber® Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic Static)	600 N 300 N
Maximum Crush Resistance (Dynamic Static)	10 kN/m 5 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	13.0±0.5(mm)
Installation Temperature	-10 to 60 °C (14 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)