




General Specifications

P/N	TF288RR-OS2-PVC - 2
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	RISER (PVC) YELLOW
Fiber Category	Singlemode OS2 9/125
Fiber Type	G657A2
Fiber Count / Grouping	288 Strand 24X 12F Rollable
Construction	250 m Intermittently Bonded Rollable Ribbon
Maximum Attenuation	≤0.36 dB/KM @ 1310nm ≤0.23 dB/KM @ 1550nm
Core/Cladding	9/125
Water Block	No
Armor	TiniFiber® Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic Static)	800 N 600 N
Maximum Crush Resistance (Dynamic Static)	20 kN/m 6 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	16.8±0.8 mm
Cable Weight	257 kg/km (~117 lbs/kft)
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)
Storage Temperature	-15 to 60 °C (5 to 140 °F)

Part Number: TF288RR-OS2-PVC - 2
288 Strand, TiniFiber® Micro Armor™ + Steel Braid, Singlemode OS2
9/125, 250 µm Intermittently Bonded Rollable Ribbon, PVC, Riser,
Yellow, Indoor Premise, Duct, Conduits, and Patch

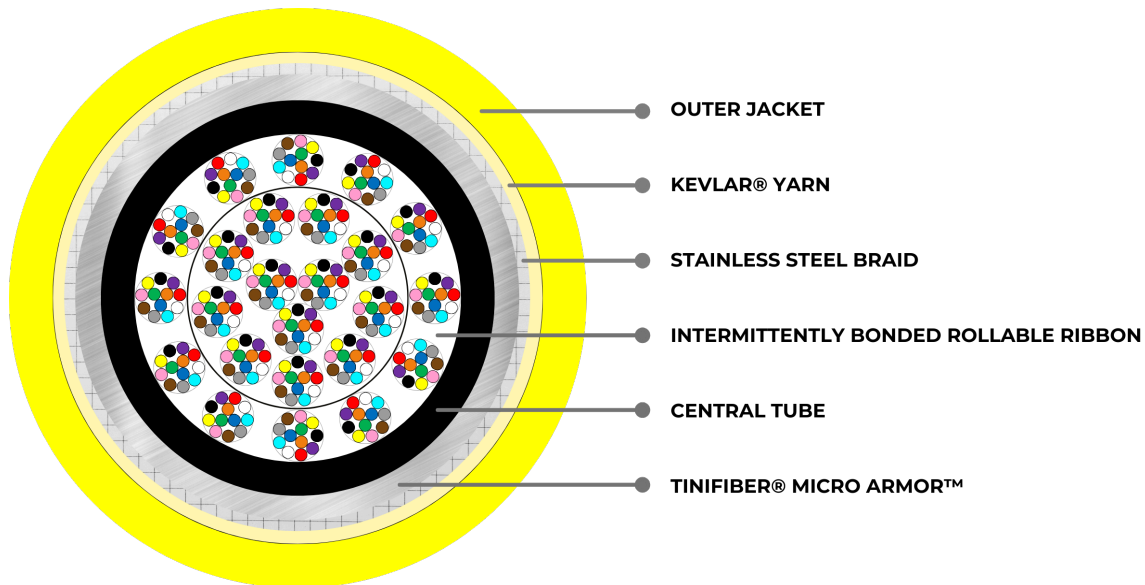

Standards	Telecordia GR-409, TIA-568.3, ICEA-S-83-596
Conductor Count	
Conductor Gauge	
Conductor Type	
Conductor Outer Jacket Material	
Conductor Color Code	
Patent Number	https://tinifiber.com/patent-notice