Part Number: TF2Z-OS2-PL3.0
2 Strand 900 m Tight Buffer Singlemode OS2 9/125 TiniFiber® Micro Armor™ Yellow Plenum (PVC) Zip Indoor Premise, Duct, Conduits, and Patch

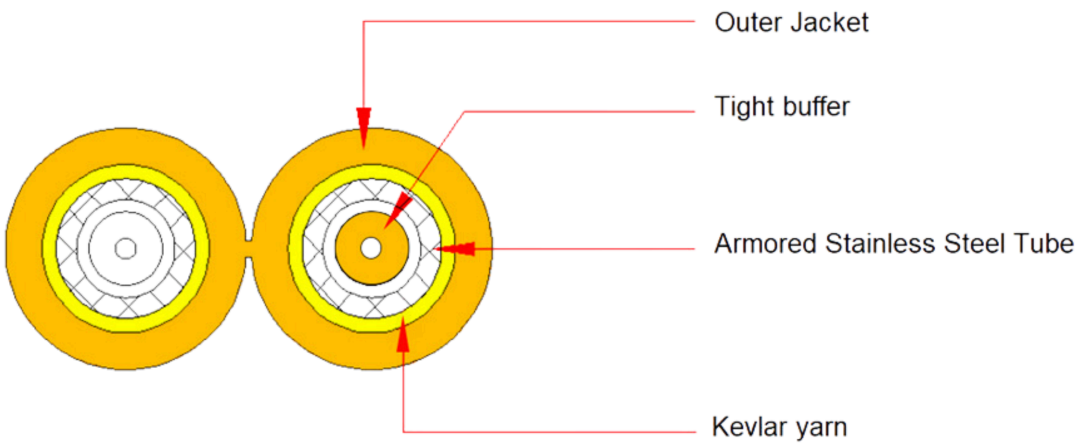

General Specifications

P/N	TF2Z-OS2-PL3.0
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM (PVC) | YELLOW
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	2 Strand Zip
Construction	900 µm Tight Buffer
Core/Cladding	9/125
Armor	TIniFiber Micro Armor™
Maximum Tensile Strength (Dynamic | Static)	225 N | 135 N
Maximum Crush Resistance (Dynamic | Static)	30 kN/m | 8 kN/m
Minimum Bend Radius (Dynamic | Static)	30D | 10D
Nominal Outer Diameter	2.8-2.95*5.7±0.2mm
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)

1180 ROUTE 109 | Lindenhurst, NY 11757 | 1(800)-396-0142 | sales@tinifiber.com