


Part Number: TF2Z-OS2-PVC3.0

2 Strand 900 m Tight Buffer Singlemode OS2 9/125 TiniFiber® Micro Armor™ Yellow Riser (PVC) Zip Indoor Premise, Duct, Conduits, and Patch

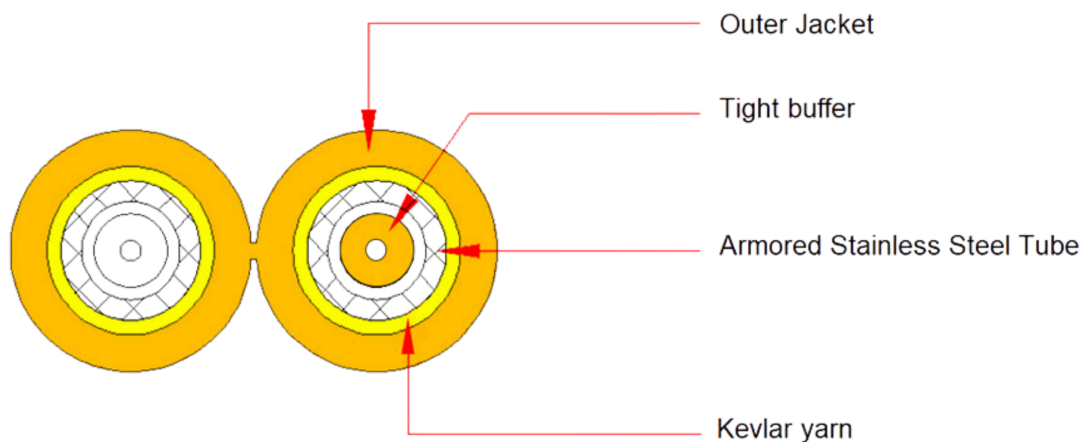

General Specifications

P/N	TF2Z-OS2-PVC3.0
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PVC YELLOW
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	2 Strand Zip
Construction	900 µm Tight Buffer
Core/Cladding	9/125
Armor	TIniFiber Micro Armor™
Maximum Tensile Strength (Dynamic Static)	225 N 135 N
Maximum Crush Resistance (Dynamic Static)	30 kN/m 8 kN/m
Minimum Bend Radius (Dynamic Static)	30D 10D
Nominal Outer Diameter	2.8-2.95*5.7±0.2mm
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)