Part Number: TF2Z-OM3-PLO.AQ - 2
2 Strand / Zip, TiniFiber Micro Armor™ + Steel Braid, Multimode OM3 50/125, 900 µm Tight Buffer, PLENUM-UV, AQUA, Plenum, Indoor/ Outdoor Premise, Duct, Conduits, and Patch

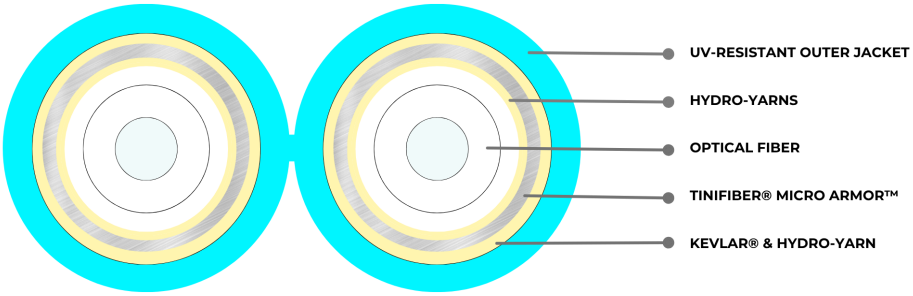

General Specifications

P/N	TF2Z-OM3-PLO.AQ - 2
Application and Uses	Indoor/Outdoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM-UV | AQUA
Fiber Category	Multimode OM3 50/125
Fiber Type	
Fiber Count / Grouping	2 Strand / Zip
Construction	900 µm Tight Buffer
Maximum Attenuation	≤3.0 dB/km @ 850 nm | ≤1.5 dB/km @1300 nm
Core/Cladding	
Water Block	Yes
Armor	TiniFiber Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic | Static)	225 N | 135 N
Maximum Crush Resistance (Dynamic | Static)	30 kN/m | 10 kN/m
Minimum Bend Radius (Dynamic | Static)	20D | 10D
Nominal Outer Diameter	2.8-2.95*5.7±0.2mm
Cable Weight	24 kg/km (~16 lbs/kft)
Installation Temperature	-10 to 60 °C (14 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)
Storage Temperature	-15 to 60 °C (5 to 140 °F)

1180 ROUTE 109 | Lindenhurst, NY 11757 | 1(800)-396-0142 | sales@tinifiber.com

Standards	Telcordia GR-20, TIA-568.3, ICEA-S-104-696
Conductor Count	
Conductor Gauge	
Conductor Type	
Conductor Outer Jacket Material	
Conductor Color Code	
Patent Number	https://tinifiber.com/patent-notices

1180 ROUTE 109 | Lindenhurst, NY 11757 | 1(800)-396-0142 | sales@tinifiber.com