


Part Number: TF72R-OS2-PL
72 Strand 6x12f 250 µm Central Tube Flat Stacked Ribbon
Singlemode OS2 9/125 TiniFiber® Micro Armor™ + Steel Braid
YELLOW PLENUM (PVC) Indoor Premise, Duct, Conduits, and Patch

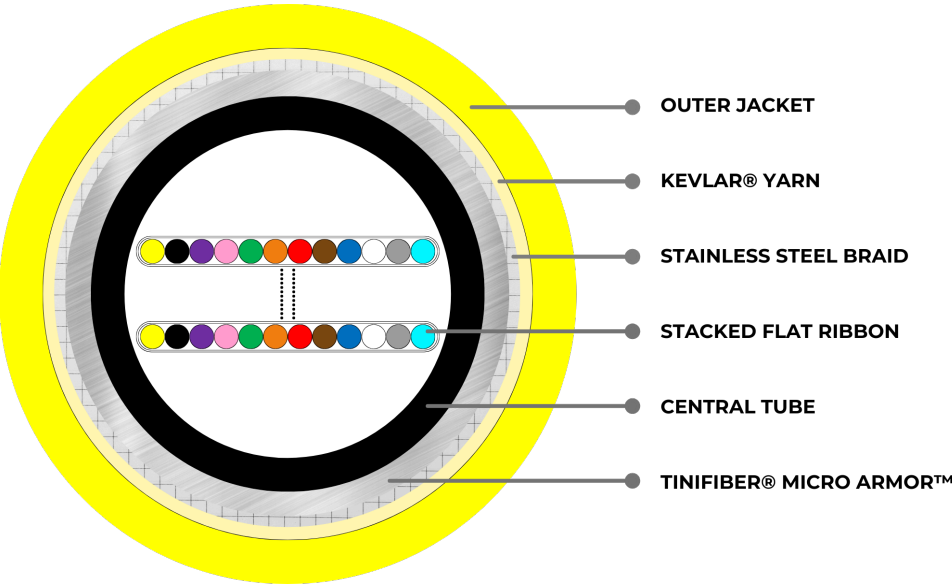

General Specifications

P/N	TF72R-OS2-PL
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM (PVC) YELLOW
Fiber Category	Singlemode OS2 9/125
Fiber Count / Grouping	72 Strand 6x12f
Construction	250 µm Central Tube Flat Stacked Ribbon
Water Block	FALSE
Armor	TiniFiber® Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic Static)	600 N 300 N
Maximum Crush Resistance (Dynamic Static)	10 kN/m 5 kN/m
Nominal Outer Diameter	11.5±0.5 mm
Cable Weight	154
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)