


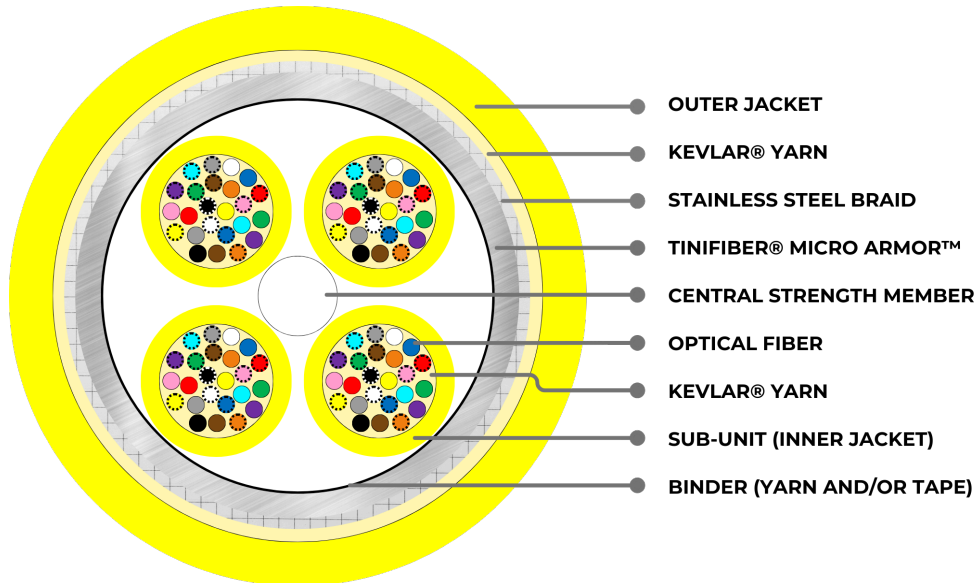

General Specifications

P/N	TF96-OS2-PL
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM (PVC) YELLOW
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	96 Strand (4x24f)
Construction	250 µm TiniFiber Sub-unitized
Core/Cladding	9/125
Aarmor	TiniFiber Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic Static)	1250 N 500 N
Maximum Crush Resistance (Dynamic Static)	20 kN/m 5 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	11.5 ±0.5(mm)
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)