


Part Number: TF1-OS2-LSZH
 1 Strand 900 µm Tight Buffer Singlemode
 OS2 9/125 TiniFiber® Micro Armor™
 YELLOW LSZH (POE) Indoor Premise,
 Duct, Conduits, and Patch

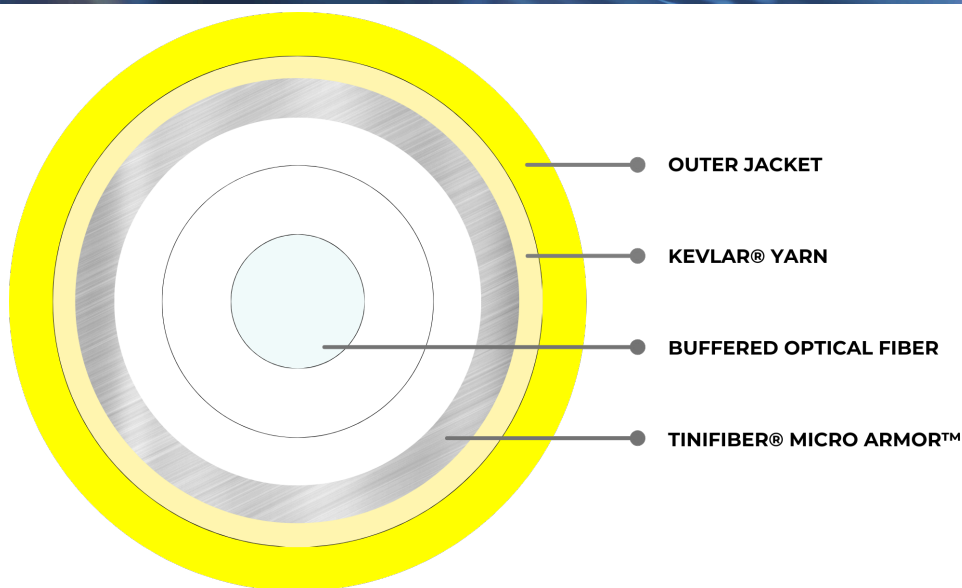

General Specifications

P/N	TF1-OS2-LSZH
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	LSZH (POE) YELLOW
Fiber Category	Singlemode OS2 9/125
Fiber Count / Grouping	1 Strand
Construction	900 µm Tight Buffer
Water Block	FALSE
Maximum Tensile Strength (Dynamic Static)	150 N 80 N
Maximum Crush Resistance (Dynamic Static)	30 kN/m 8 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	2.9±0.1 mm
Cable Weight	14 kg/km (~9 lbs/kft)
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-20 to 70 °C (-4 to 158 °F)