


Micro Armor Fiber™ The Original Stainless Steel Armor SingleMode 144 Core OS2 Armored Indoor/Outdoor Plenum Model # TF144-OS2-PLO

TiniFiber™ is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber® can be used in any channel from Telco, CATV, WAN LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor as well as Aerial installations and regardless of environmental conditions.

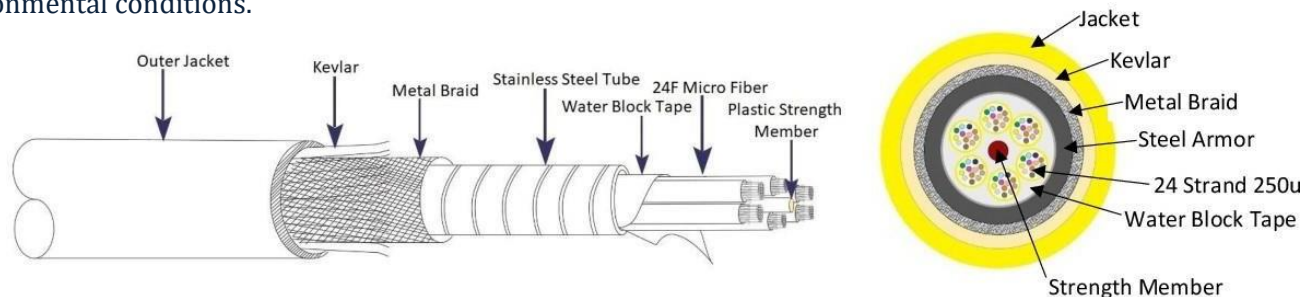

Outer Jacket
Material: Plenum
Color: Black
Outer Diameter: 13mm

6*24F Micro Fiber, Strength Member, Tape,
Steel Tube, Metal Braid, Kevlar & Water
Block Yarn, Outer Jacket (UL/OFCP)

TiniFiber® Micro Armor Fiber™ Key Features


Feature	Benefits
Micro Armor Fiber™	<ol style="list-style-type: none"> 1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility 2. Lightest and smallest armor makes routing and installation faster and easier 3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor(AIA)
Encased Stainless Steel Coiled Tubular Armor	<ol style="list-style-type: none"> 1. Provides the strongest armor with maximum bend radius and designed for all indoor & outdoor conditions 2. Crush and rodent resistance for multiple usages
Outer Jackets	<ol style="list-style-type: none"> 1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial & Industrial projects
MultiMode/SingleMode Strands	<ol style="list-style-type: none"> 1. OS2, OM1, OM3, OM4 from 1 to 144 Strands (250u/900u/Ribbon) 2. Available in all standard connectors
Kevlar Fiber Strands	<ol style="list-style-type: none"> 1. Adds tensile strength and flexibility

Competitive Product Analysis

Feature	Micro Armor Fiber®	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
Maximum Bend Radius	✓		✓
Smallest OD With Armor	✓		
Lightest Armor Fiber	✓		
Strongest Armor Fiber	✓	✓	
Lowest Installation Cost	✓		✓

Micro Armor Fiber™ The Original Stainless Steel Armor SingleMode 144 Core OS2 Armored Indoor/Outdoor Plenum Model # TF144-OS2-PLO

Common Installations: Ducts, conduits and outdoor when installed according to NEC® Article 770
Design and Test Criteria: ANSI/ICEA S-87-640

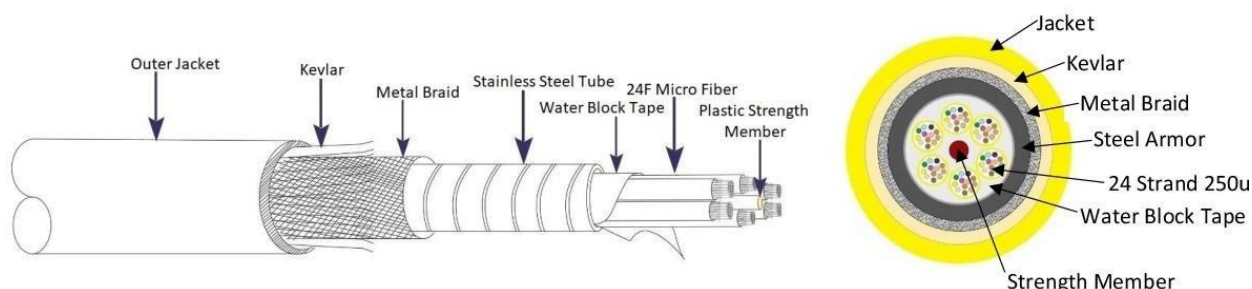

General Specifications

Application	Indoor/Outdoor Premise, Duct, and Conduits
Fiber Category	SingleMode (OS2)
Fiber Type	BIF G.657.A2
Storage	-40 °C to 80 °C (-40 °F to 176 °F)
Installation	-30 °C to 80 °C (-22 °F to 176 °F)
Operation	-40 °C to 80 °C (-40 °F to 176 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	20D
Min. Static Bend Radius	10D
Nominal Outer Diameter	13 mm
Weight	200 kg/km
Stainless Steel Tube Outer Diameter	10.0 mm
Stainless Steel Tube Inner Diameter	9.8 mm
Wavelengths/Max. Attenuation	1310 nm/<0.35dB/km, 1550 nm/<0.25dB/km
Fiber core/cladding diameter	9/125 um
Fiber Count	One hundred forty four (144)
Steel Braid/Water Block	Yes/Yes
Kevlar	10 x 1100dtex
Maximum Data Rate	100 GB
NEC Rating	OFCP