Part Number: TF288-OS2-PLO
288 Strand 12x24f 250 µm Sub-unitized Singlemode OS2 9/125
TiniFiber® Micro Armor™ + Steel Braid YELLOW PLENUM (PVC)
Indoor Premise, Duct, Conduits, and Patch

tiniFiber®
Flexible. Durable. Adaptable.

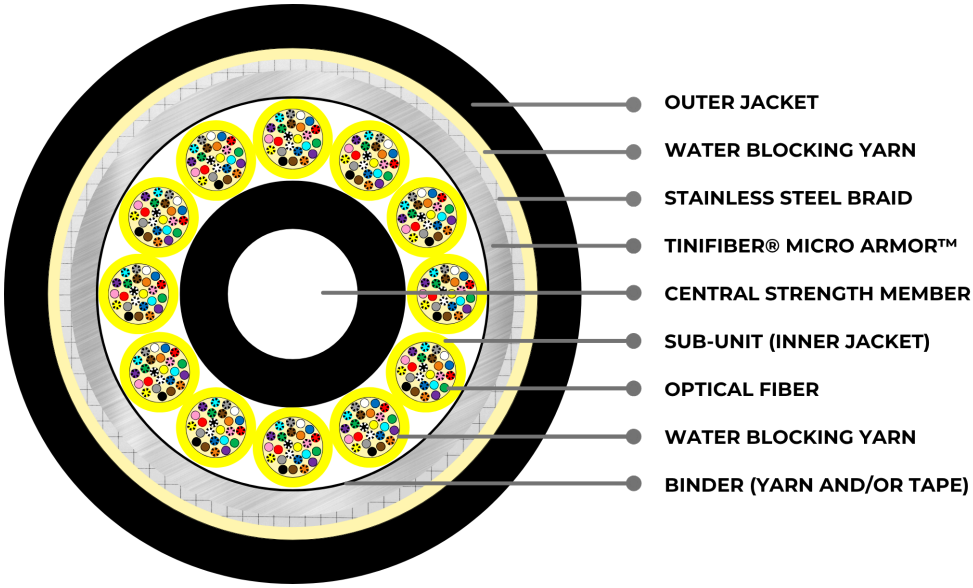

General Specifications

P/N	TF288-OS2-PLO
Application and Uses	Indoor/outdoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM (PVC) | Black
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	288 Strand | 12x24f
Construction	250 µm Sub-unitized
Core/Cladding	9/125
Water Block	Yes
Armor	TiniFiber Micro Armor™ + Steel Braid
Maximum Tensile Strength (Dynamic | Static)	2000 N | 1000 N
Maximum Crush Resistance (Dynamic | Static)	30 kN/m | 10 kN/m
Minimum Bend Radius (Dynamic | Static)	20D | 10D
Nominal Outer Diameter	19.5±0.5
Installation Temperature	-10 to +60 °C
Operation Temperature	-15 to +60 °C
Storage Temperature	-15 to +60 °C
Patent Number	https://tinifiber.com/patent-notices

1180 ROUTE 109 | Lindenhurst, NY 11757 | 1(800)-396-0142 | sales@tinifiber.com