


Micro Armor Fiber™ The Original Stainless Steel Armor Multimode 6 Fiber 900mm OM4 Armored Indoor/Outdoor Plenum Fiber Optic Cable Model #TF6-OM4-PL

TiniFiber® is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber™ can be used in any application: Telco, CATV, LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor and Aerial installations.

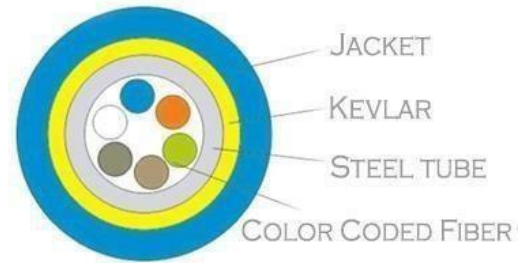

Outer Jacket
Material: Plenum Rated-UV
Color: Black
Outer Diameter: 6.0 mm

900mm Color Coded Fiber, Steel Tube, Kevlar,
Outer Jacket (Black) UV/OFCP

TiniFiber® Micro Armor Fiber™ Key Features


Feature	Benefits
Micro Armor Fiber™	<ol style="list-style-type: none"> 1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility 2. Lightest and smallest armor makes routing and installation faster and easier 3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor (AIA)
Encased Stainless Steel Coiled Tubular Armor	<ol style="list-style-type: none"> 1. Provides the strongest armor with smallest bend radius and designed for all indoor & outdoor conditions 2. Crush and rodent resistance
Outer Jackets	<ol style="list-style-type: none"> 1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial & Industrial projects
Multimode/Single Mode Fibers	<ol style="list-style-type: none"> 1. OS2, OM1, OM3, OM4 from 1 to 144 Fibers (250m/900m/Ribbon) 2. Available in all standard connectors
Kevlar	<ol style="list-style-type: none"> 1. Adds tensile strength and flexibility

Competitive Product Analysis

Feature	Micro Armor Fiber™	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
Small Bend Radius	✓		✓
Smallest OD With Armor	✓		
Lightest Armor	✓		
Strongest Armor	✓	✓	
Lowest Installation Cost	✓		✓

Micro Armor Fiber™ The Original Stainless Steel Armor Multimode 6 Fiber 900mm OM4 Armored Indoor/Outdoor Plenum Fiber Optic Cable Model #TF6-OM4-PL

Common Installations: Ducts, conduits and indoor when installed according to NEC® Article 770
Design and Test Criteria: ANSI/ICEA S-87-640

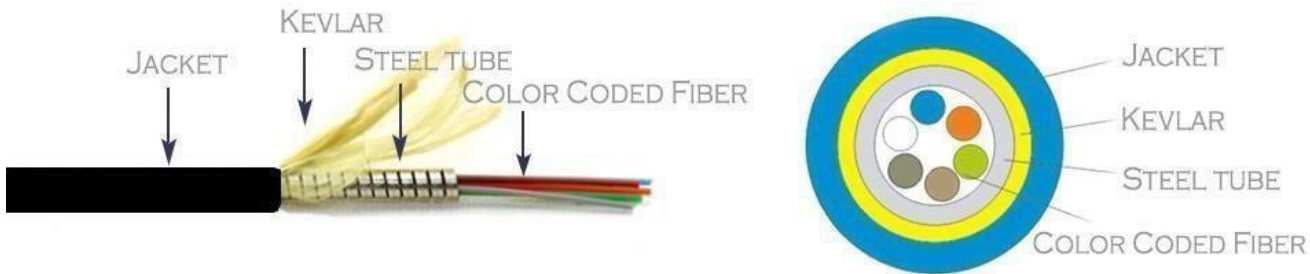

Competitive Product Analysis

Application	Indoor Premise, Duct, Conduits and Patch
Fiber Category	Multimode (OM4)
Fiber	Clear Curve Bend Insensitive
Storage	-40 °C to 80 °C (-40 °F to 176 °F)
Installation	-30 °C to 80 °C (-22 °F to 176 °F)
Operation	-40 °C to 80 °C (-40 °F to 176 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	110 mm/ 4.3 in
Min. Static Bend Radius	55 mm/ 2.2 in
Nominal Outer Diameter	6.0 mm
Weight	55 kg/km
Stainless Steel Tube Outer Diameter	4.4 mm
Stainless Steel Tube Inner Diameter	3.2 mm
Wavelengths/Max. Attenuation	850 nm/<3.0dB/km, 1300 nm/<1.0dB/km
Fiber Core/Cladding Diameter	50/125 mm
Fiber Count	6
Steel Braid/Water Block	No/No
Kevlar	1000dtex
Maximum Data Rate	40 GB
NEC Rating	OFCP