


Part Number: TF6-OS2-PL  
 6 Strand 900 µm Tight Buffer Singlemode  
 OS2 9/125 TiniFiber® Micro Armor™ + Steel  
 Braid YELLOW PLENUM (PVC) Indoor  
 Premise, Duct, Conduits, and Patch

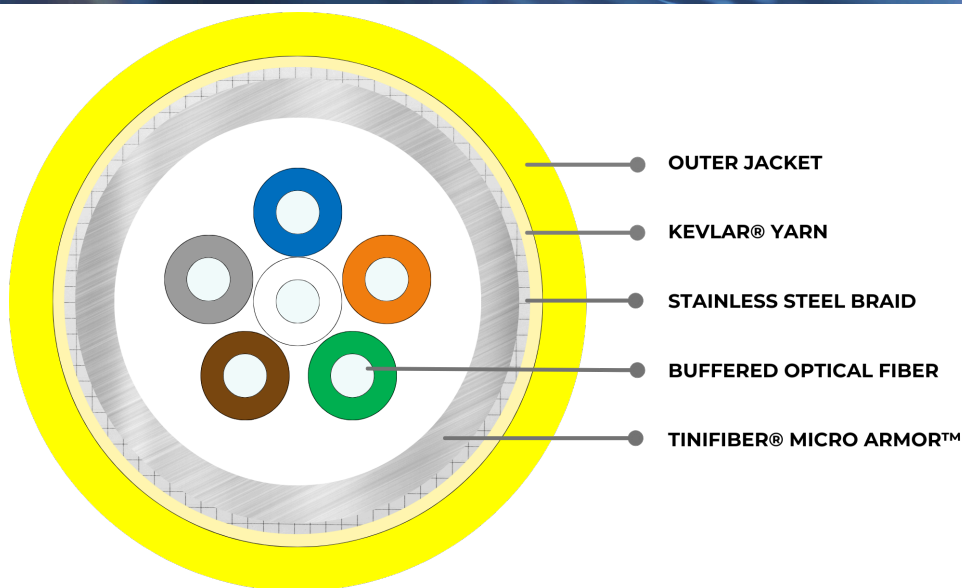

## General Specifications

P/N	TF6-OS2-PL
Application and Uses	Indoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM (PVC)   YELLOW
Fiber Category	Singlemode OS2 9/125
Fiber Count / Grouping	6 Strand
Construction	900 µm Tight Buffer
Water Block	FALSE
Maximum Tensile Strength (Dynamic   Static)	600 N   200 N
Maximum Crush Resistance (Dynamic   Static)	30 kN/m   5 kN/m
Minimum Bend Radius (Dynamic   Static)	20D   10D
Nominal Outer Diameter	6.0±0.5 mm
Cable Weight	56 kg/km (~38 lbs/kft)
Installation Temperature	0 to 60 °C (32 to 140 °F)
Operation Temperature	-15 to 60 °C (5 to 140 °F)