

## Micro Armor Fiber™ The Original Stainless Steel Armor Single Mode 2 Fiber 900mm OS2 with 2x18 AWG Conductors Model #PTF2-OS2-18/2

TiniFiber® is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber™ can be used in any application: Telco, CATV, LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor as well as Aerial installations.



**Outer Jacket**  
 Material: TPE  
 Color: Black  
 Outer Diameter: 9.0mm

900mm Color Coded Fiber,  
 Steel Tube, Kevlar, Water Block Yarn,  
 Outer Jacket (TPE, Black) UL/UFC

### TiniFiber® Micro Armor Fiber™ Key Features

Feature	Benefits
<b>Micro Armor Fiber™</b>	1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility 2. Lightest and smallest armor makes routing and installation faster and easier 3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor (AIA)
<b>Encased Stainless Steel Coiled Tubular Armor</b>	1. Provides the strongest armor with smallest bend radius and designed for all indoor & outdoor conditions 2. Crush and rodent resistance
<b>Outer Jackets</b>	1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial & Industrial projects
<b>Multimode/Single Mode Fibers</b>	1. OS2, OM1, OM3, OM4 from 1 to 144 Fibers (250m/900m/Ribbon) 2. Available in all standard connectors
<b>Kevlar</b>	1. Adds tensile strength and flexibility
<b>Fiber PLUS Power</b>	1. Install one cable with power to the device (cameras) and avoid piping & lower labor cost 2. The "Power Cables" can be 2, 3 or 4 conductors with 12 AWG to 22 AWG options


### Competitive Product Analysis

Feature	Micro Armor Fiber™	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
<b>Small Bend Radius</b>	✓		✓
<b>Smallest OD With Armor</b>	✓		
<b>Lightest Armor</b>	✓		
<b>Strongest Armor</b>	✓	✓	
<b>Lowest Installation Cost</b>	✓		✓

## Micro Armor Fiber™ The Original Stainless Steel Armor Single Mode 2 Fiber 900mm OS2 with 2x18 AWG Conductors Model #PTF2-OS2-18/2

**Common Installations:** Ducts, conduits, riser, and outdoor when installed according to NEC® Article 770

**Design and Test Criteria:** ANSI/ICEA S-87-640

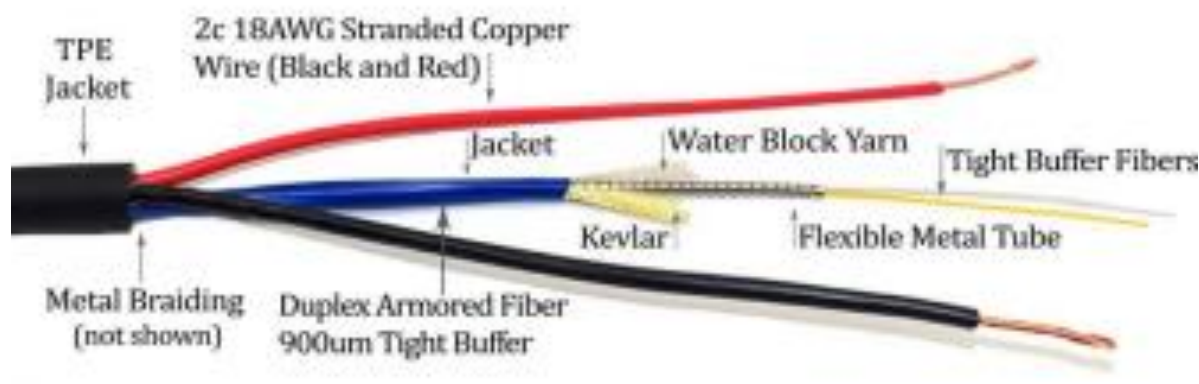

### General Specifications

Application	Outdoor Premise, Duct, Conduits, Riser and Patch
Fiber Category	Single Mode (OS2)
Fiber	Clear Curve Bend Insensitive
Storage	-60 °C to 70 °C (-76°F to 158 °F)
Installation	-60 °C to 70 °C (-76 °F to 158 °F)
Operation	-60 °C to 70 °C (-76 °F to 158 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	110 mm/ 4.3 in
Min. Static Bend Radius	55 mm/ 2.2 in
Nominal Outer Diameter	9.0 mm
Weight	120 kg/km
Stainless Steel Tube Outer Diameter	2.2 mm
Stainless Steel Tube Inner Diameter	1.9 mm
Wavelengths/Max. Attenuation	1310   ≤ 0.35dB/km G1550   ≤ 0.25dB/km
Fiber Core/Cladding Diameter	9/125 mm
Fiber Count	2
# Conductors x Gauge	2 x 18 AWG
Steel Braid/Water Block	Yes/Yes
Kevlar	1000dtex
Maximum Data Rate	Up to 100 GB
NEC Rating	OFC