


## Micro Armor Fiber™ The Original Stainless Steel Armor Multimode 12 Fiber 250mm OM4 Armored Indoor/Outdoor Plenum Fiber Optic Cable Model #TF12-OM4-PLO

TiniFiber® is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber™ can be used in any application: Telco, CATV, LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor and Aerial installations.

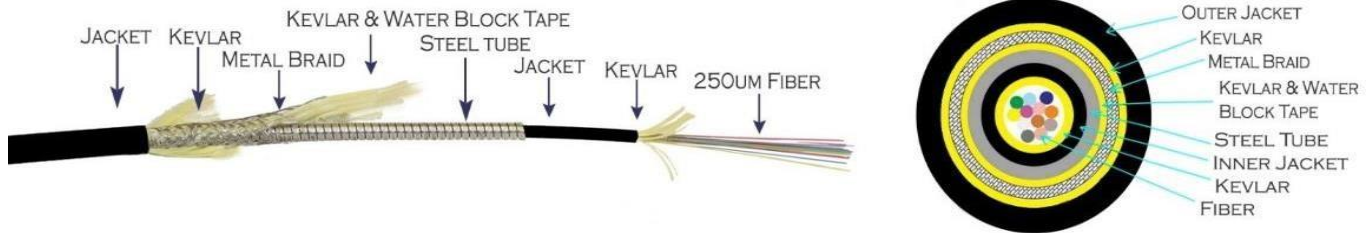

**Outer Jacket**  
 Material: Plenum Rated  
 Color: Black  
 Outer Diameter: 5.5 mm

250mm Color Coded Fiber, Kevlar, Inner  
 Jacket, Steel Tube, Outer Jacket (Black)  
 UL/OFCP

### TiniFiber® Micro Armor Fiber™ Key Features



Feature	Benefits
<b>Micro Armor Fiber™</b>	1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility 2. Lightest and smallest armor makes routing and installation faster and easier 3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor (AIA)
<b>Encased Stainless Steel Coiled Tubular Armor</b>	1. Provides the strongest armor with smallest bend radius and designed for all indoor & outdoor conditions 2. Crush and rodent resistance
<b>Outer Jackets</b>	1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial & Industrial projects
<b>Multimode/Single Mode Fibers</b>	1. OS2, OM1, OM3, OM4 from 1 to 144 Fibers (250m/900m/Ribbon) 2. Compatible with all standard connectors
<b>Kevlar</b>	1. Adds tensile strength and flexibility

### Competitive Product Analysis

Feature	Micro Armor Fiber™	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
<b>Small Bend Radius</b>	✓		✓
<b>Smallest OD With Armor</b>	✓	✓	
<b>Lightest Armor</b>	✓	✓	
<b>Strongest Armor</b>	✓		
<b>Lowest Installation Cost</b>	✓		✓

## Micro Armor Fiber™ The Original Stainless Steel Armor Multimode 12 Fiber 250mm OM4 Armored Indoor/Outdoor Plenum Fiber Optic Cable Model #TF12-OM4-PLO

**Common Installations:** Ducts, conduits, indoor, and outdoor when installed according to NEC® Article 770  
**Design and Test Criteria:** ANSI/ICEA S-87-640

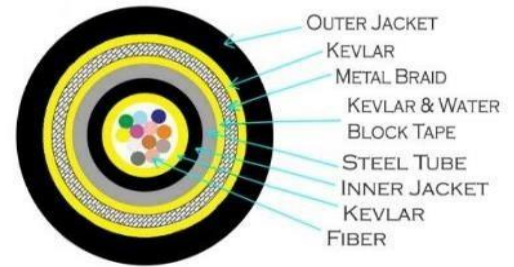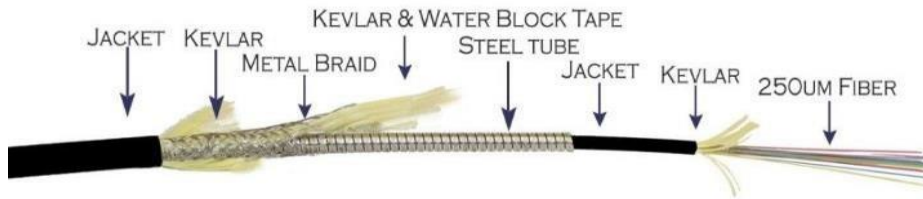

### General Specifications

Application	Indoor/Outdoor Premise, Duct, Conduits, and Patch
Fiber Category	Multimode (OM4)
Fiber	Clear Curve Bend Insensitive
Storage	-40 °C to 80 °C (-4 °F to 158 °F)
Installation	-30 °C to 80 °C (-10 °F to 140 °F)
Operation	-40 °C to 80 °C (-4 °F to 158 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	110 mm/4.3 in
Min. Static Bend Radius	55 mm/2.2 in
Nominal Outer Diameter	5.5 mm
Weight	45 kg/km
Stainless Steel Tube Outer Diameter	3.5 mm
Stainless Steel Tube Inner Diameter	2.8 mm
Wavelengths/Max. Attenuation	1300   ≤ 1.5dB/km 850   ≤ 3.0 dB/km
Fiber Core/Cladding Diameter	50/125 mm
Fiber Count	24
Steel Braid/Water Block	Yes/No
Kevlar	1000dtex
Maximum Data Rate	40 GB
NEC Rating	OFCP